


r H 11 mm	d1 js 16 mm	b mm	d2 H7 mm
1	50	6	16
1,25	50	6	16
1,5	50	8	16
1,6	50	8	16
2	50	9	16
2,5	63	10	22
3	63	12	22
3,15	63	12	22
3,5	63	16	22
4	63	16	22
5	63	20	22
6	80	24	27
6,3	80	24	27
7	80	28	27
8	80	32	27
9	90	36	27
10	100	36	32
12	100	40	32
12,5	100	40	32
14	100	48	32
15	125	50	32
16	125	50	32
18	125	56	32
19	125	60	32
20	125	60	32

Fresa de perfil constante, semi-circular côncava (detalonada).
Fresa de perfil constante, semi circular cóncava (destalonada).
 Form relieved concave cutter.

HSS (M2)

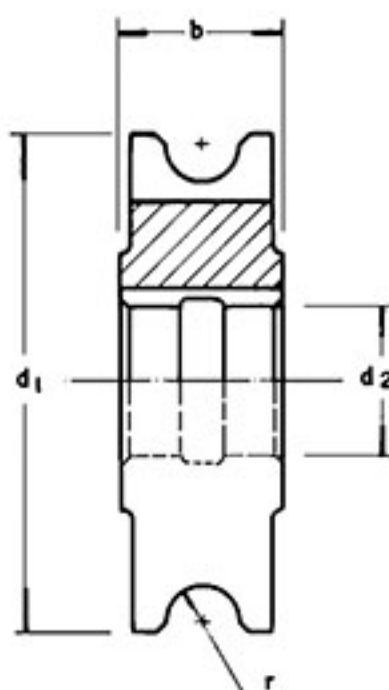


1381
DIN 855 A

Ex. de especificação: 1381 r 5

Fresa de perfil constante, 1/4 de círculo côncava corte à direita (detalonada).
Fresa de perfil constante, 1/4 de círculo cóncava, corte a la derecha (destalonada).
 Form relieved, 1/4 corner rounding cutter, concave, right-hand cut.

r H 11 mm	d1 js 16 mm	b mm	d2 H7 mm
1	50	4	16
1,25	50	4	16
1,6	50	5	16
2	50	5	16
2,5	63	5	22
3	63	6	22
3,15	63	6	22
4	63	8	22
5	63	10	22
6	80	12	27
6,3	80	12	27
7	80	16	27
8	80	16	27
10	100	18	32
12	100	20	32
12,5	100	20	32
16	125	24	32
20	125	28	32

HSS (M2)

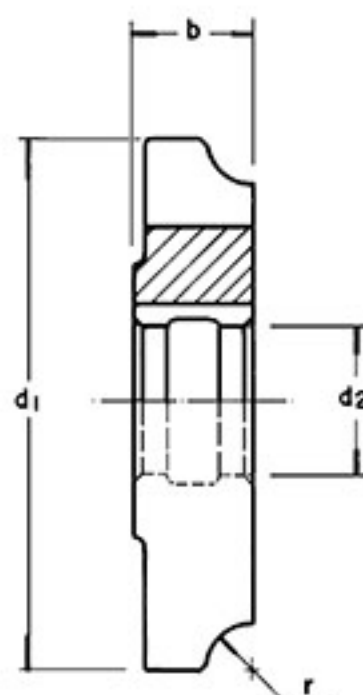

1391
DIN 6513

Ex. de especificação: 1391 - r 2,0