


Broca calibradora 3 cortes, haste cone morse.
Core drills 3 flute with morse taper shank.

HSS (M2)

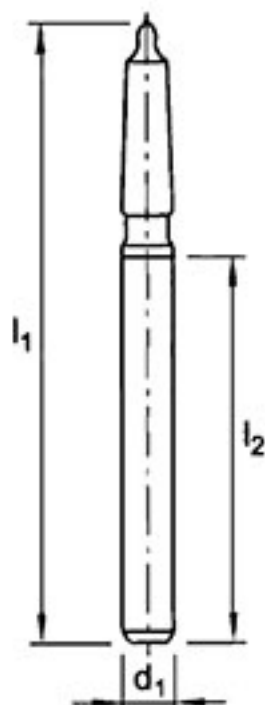

4002

DIN 343
série curta
short type

4003

DIN 1864
série longa
long type

d1 h 8 mm	curta l2 / l1 mm	longa l2 / l1 mm	cone morse nº
8	75 / 156	100 / 181	1
9	81 / 162	107 / 188	1
10	87 / 168	116 / 197	1
11	94 / 175	125 / 206	1
12	101 / 182	134 / 215	1
13	101 / 182	134 / 215	1
14	108 / 189	142 / 223	1
15	114 / 212	147 / 245	2
16	120 / 218	153 / 251	2
17	125 / 223	159 / 257	2
18	130 / 228	165 / 263	2
19	135 / 233	171 / 269	2
20	140 / 238	177 / 275	2
21	145 / 243	184 / 282	2
22	150 / 248	191 / 289	2
23	155 / 253	198 / 296	2
24	160 / 281	206 / 327	3
25	160 / 281	206 / 327	3
26	165 / 286	214 / 335	3
27	170 / 291	222 / 343	3
28	170 / 291	222 / 343	3
29	175 / 296	230 / 351	3
30	175 / 296	230 / 351	3
31	180 / 301	239 / 360	3
32	185 / 334	-	4
33	185 / 334	-	4
34	190 / 339	-	4
35	190 / 339	-	4
36	195 / 344	-	4
37	195 / 344	-	4
38	200 / 349	-	4
39	200 / 349	-	4
40	200 / 349	-	4
41	205 / 354	-	4
42	205 / 354	-	4
43	210 / 359	-	4
44	210 / 359	-	4
45	210 / 359	-	4
46	215 / 364	-	4
47	215 / 364	-	4
48	220 / 369	-	4
49	220 / 369	-	4
50	220 / 369	-	4